

# JUMPER STORAGE TOWER



**OPTIMISEZ**  
your storage space and increase your productivity

**SÉCURISEZ**  
your product removal and access

**SIMPLIFIEZ**  
your management and avoid out of stock


Up to 90% less space occupied

Accident prevention

Controlled environment (humidity, temperature, ISO norms and fire resistance)

Reduction of expiries

Badge and password identification

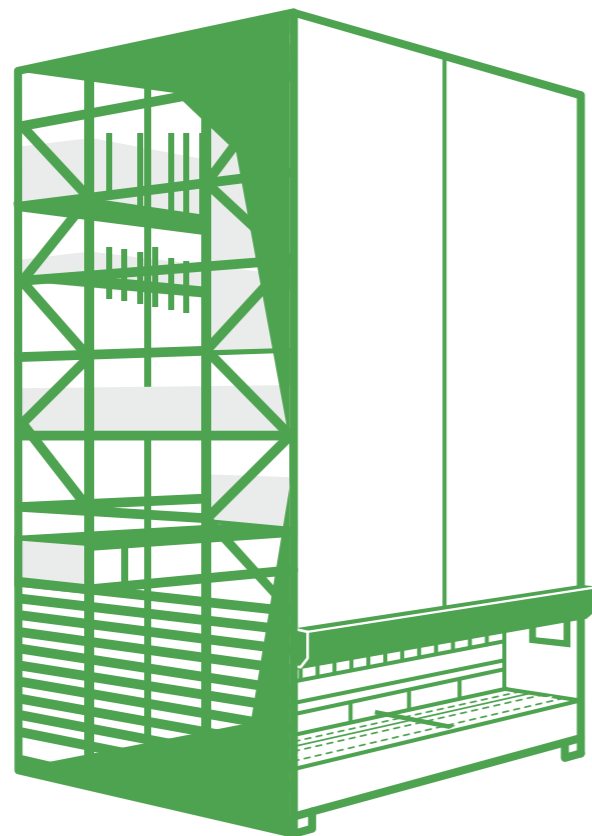

Over 99% availability rate

Less picking errors

Standard or custom project-based solutions

Traceability of the products


Management interface possible with your ERP

**Préparation de commandes - BIOMET**  
Gestion de 7000 lignes de commandes clients par jour.  
**Objectif :** Gain de productivité et diminution des erreurs de picking.


**Gestion des références - CH LA PITIE SALPETRIERE**  
Gestion en temps réel des entrées et sorties de 400 références de l'économat.  
**Objectif :** Optimisation des commandes ainsi qu'une diminution du stock de moitié

**Réorganisation du stock - BECTON DICKINSON MEDICAL SYSTEM**  
Réorganisation de plusieurs magasin et gestion de 26 000 références aéronautiques  
**Objectif :** Amélioration de la gestion des délais de fabrication des pièces de maintenance.

## Dynamism, expertise, analysis, innovation

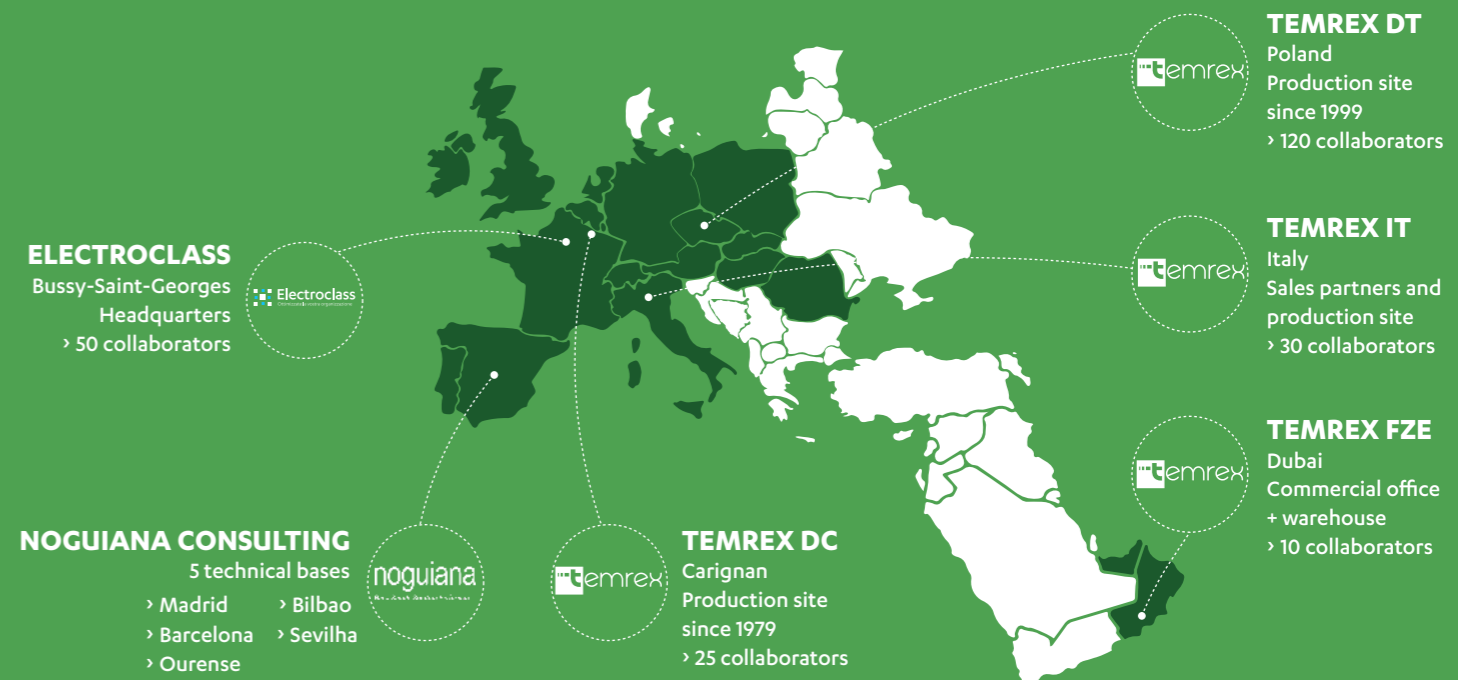

## Key figures

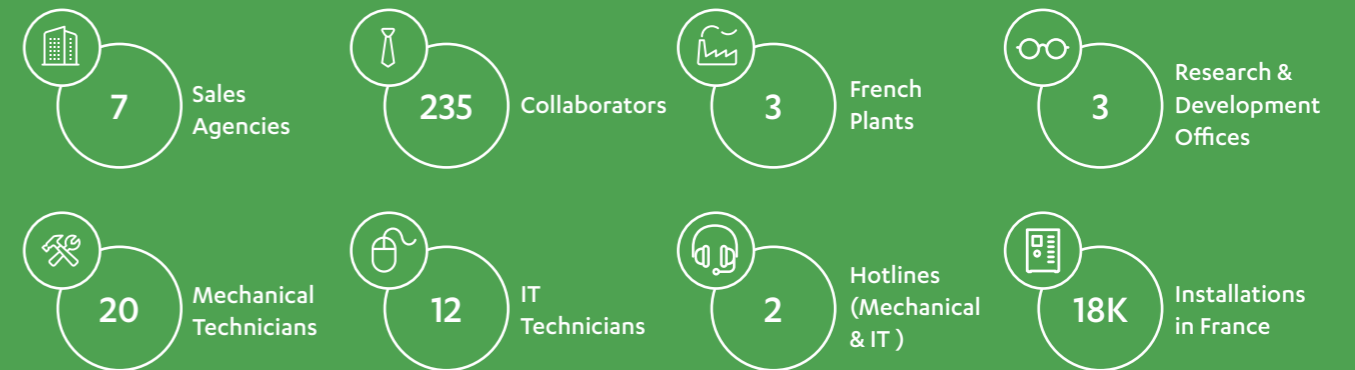

## Contact us!



**ELECTROCLASS**  
12 avenue Gutenberg,  
PA Gustave Eiffel  
77600 Bussy-Saint-Georges  
  
t. +33 01 80 66 99 90  
f. +33 01 64 76 63 72  
info@electroclass.com  
www.electroclass.com

Simplified joint-stock company (French SAS) with a registered capital of 546 100 €  
Meaux Trade and Companies Register (French RCS) 2008B02121  
APE business identifier: 4666Z  
SIRET number: 316 654 441 00096  
Intracommunity VAT number: FR 43 316 654 441





## TECHNICAL SPECIFICATIONS

Mechanically-welded drawers for distribution non-homogeneous payloads



rack and pinion drive.= precision + safety + reliability (rack guaranteed for 15 years without manufacturing defects)

Scale controlling the load on board the Jumper drawers. The weight is displayed on the touchscreen.

Light beams enabling the validation of reference sampling



WMS software, tower and warehouse control


Lifting equipment passage




Area indicators to optimize picking



Double motorization for 560 kg effective load



Clear, readable 5.7' color touch screen



EU N°15095+A1 standard, class 4 safety light curtains



## GAMME JUMPER

### JUMPER 300

### JUMPER 500

Total load (t)	60	60
Payload (kg)	From 300 to 360	From 500 to 560
Height (m)	3.5 to 11.5	3.5 to 11.5
Outer Widths (mm)	OW + 461	OW + 461
Depth Useful Drawers (mm)	635 / 825	635 / 825
External Depth (mm)	3 X Depth. Drawer + 428	3 X Depth. Drawer +428
Computer Connection	Yes	Yes

## G-STOCK WMS SOFTWARE

G-STOCK, published by TEMREX, is best-in-class WMS for managing your storers in a demand-responsive way as well as:

- › managing stock and spaces
- › managing items, packaging types, etc.
- › tracking all movements
- › managing batches, expiry dates, serial numbers, secure access, WiFi, etc.

## A 100% TEMREX service team

- › A national service network and a wide availability of parts to ensure a quick response time
- › A hotline for remote diagnosis and problem solving in man cases
- › Maintenance contracts adapted to ensure maximum availability

## 100% ELECTROCLASS solutions

Drawing on its experience and rigor, our team of designers today harmoniously combines technique and user-friendliness to offer you storage towers dedicated to enhancing your performance.

Through this approach our high-availability, connected solutions improve the productivity of tomorrow's industry.



## Ventilation, temperature, fire protection

JUMPER storage towers are frequently equipped with ventilation systems (CMV), with systems for ensuring temperature and humidity remain constant as well as a cooling unit, etc.



## Industrial technology double rack and pinion drive

No maintenance and adjustments, elimination of the risk of elongation or breakage, reduction in cycle times, stable assembly even in the event of a high speed stop (emergency stop) ...

